

MDR-CD3000

SERVICE MANUAL


*US Model
Canadian Model
AEP Model
UK Model
E Model*



SPECIFICATIONS

Type : Dynamic, closed
Driver units : ϕ 50 mm, dome type
Impedance : 32 ohms at 1 kHz
Sensitivity : 104 dB/mW
Power handling capacity : 1000 mW
Frequency response : 20 - 20,000 Hz
Cord : Approx. 3 m long 6N-OFC litz cord with
a gold-plated stereo 2-way plug
Weight : Approx. 400 g (without cord)
Design and specifications subject to change
without notice.

1. WIRING DIAGRAM

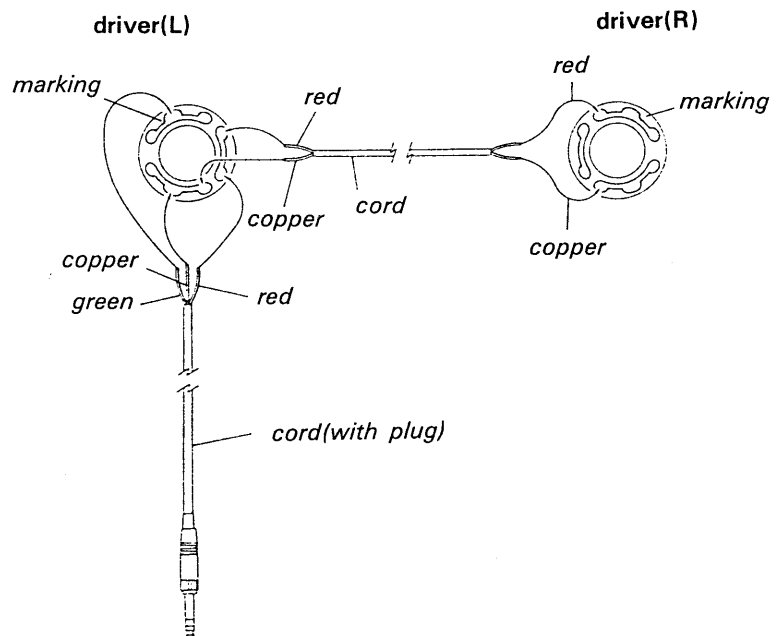

STEREO HEADPHONES
SONY®

